


CL	BEAM 1	BEAM 2	BEAM 3	BEAM 4	BEAM 5
913.89	914.08	914.27	914.35	914.16	913.98
913.90	914.08	914.27	914.35	914.16	913.98
913.98	914.16	914.35	914.42	914.24	914.06
914.05	914.24	914.42	914.48	914.30	914.13
914.11	914.30	914.48	914.53	914.38	914.19
914.16	914.35	914.53	914.56	914.43	914.24
914.19	914.38	914.56	914.58	914.46	914.27
914.21	914.39	914.58	914.58	914.48	914.29
914.21	914.39	914.58	914.56	914.48	914.29
914.19	914.38	914.56	914.54	914.46	914.28
914.17	914.35	914.54	914.51	914.44	914.25
914.14	914.32	914.51	914.51	914.40	914.22
914.14	914.32	914.51	914.51	914.41	914.22
914.22	914.40	914.59	914.59	914.48	914.30
914.29	914.48	914.66	914.66	914.56	914.37
914.35	914.54	914.72	914.72	914.62	914.43
914.40	914.59	914.77	914.77	914.67	914.48
914.43	914.62	914.80	914.80	914.70	914.51
914.45	914.63	914.82	914.82	914.72	914.53
914.45	914.63	914.82	914.82	914.72	914.53
914.43	914.62	914.80	914.80	914.70	914.52
914.41	914.59	914.78	914.78	914.68	914.49
914.38	914.56	914.75	914.75	914.64	914.46
914.38	914.56	914.75	914.75	914.65	914.46
914.46	914.64	914.83	914.83	914.73	914.54
914.53	914.72	914.90	914.90	914.80	914.61
914.59	914.78	914.96	914.96	914.86	914.67
914.64	914.83	915.01	915.01	914.91	914.72
914.67	914.86	915.04	915.04	914.94	914.75
914.69	914.87	915.06	915.06	914.96	914.77
914.69	914.87	915.06	915.06	914.96	914.77
914.67	914.86	915.04	915.04	914.94	914.76
914.65	914.83	915.02	915.02	914.92	914.73
914.62	914.80	914.99	914.99	914.88	914.70
914.62	914.81	914.99	914.99	914.89	914.70

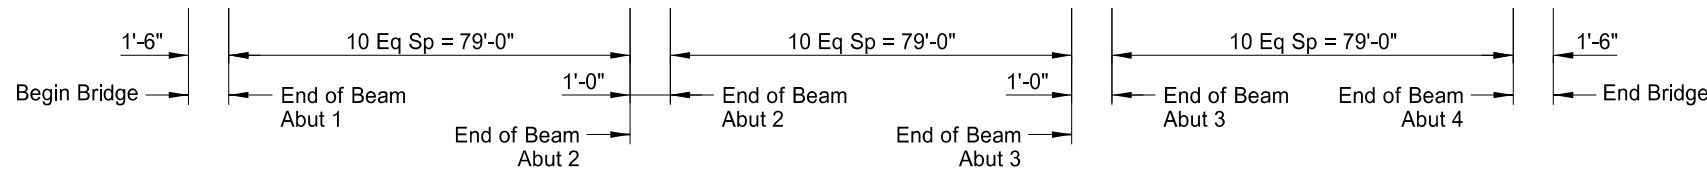


Beam 1 is the north beam.  
**SCREED ELEVATION**

**BRIDGE BID ITEMS**

SPEC	CODE	ITEM DESCRIPTION	UNIT	QUANTITY
202	0109	REMOVAL OF STRUCTURE-SITE 2	L SUM	1
210	0103	CLASS 1 EXCAVATION-SITE 2	L SUM	1
210	0113	CLASS 2 EXCAVATION-SITE 2	L SUM	1
210	0203	FOUNDATION PREPARATION-SITE 2	EA	1
256	0200	RIPRAP GRADE II	CY	1,630
602	0130	CLASS AAE-3 CONCRETE	CY	361.4
602	1130	CLASS AE-3 CONCRETE	CY	221.2
602	1133	CONCRETE BRIDGE APPROACH SLAB	SY	183.8
602	1134	PILE SUPPORTED APPROACH SLAB	SY	188.8
602	1250	PENETRATING WATER REPELLENT TREATMENT	SY	1,690
604	9620	PRESTRESSED BOX BEAM-33 IN	LF	1,185
612	0115	REINFORCING STEEL-GRADE 60	LBS	19,435
612	0116	REINFORCING STEEL-GRADE 60-EPOXY COATED	LBS	79,615
616	0360	STRUCTURAL STEEL	LBS	1,660
622	0020	STEEL PILING HP 10 X 42	LF	700
622	0040	STEEL PILING HP 12 X 53	LF	780
622	0070	STEEL PILING HP 14 X 102	LF	600
709	0155	GEOSYNTHETIC MATERIAL TYPE RR	SY	2,445
930	3000	BRIDGE BENCH MARKS	SET	1
930	9537	ABUTMENT UNDERDRAIN SYSTEM	EA	2

This drawing is preliminary and not for construction or implementation purposes.



MAPLE RIVER

**SCREED ELEVATIONS & BID ITEM QUANTITIES**