
 PCC Pavement Removal

- Notes
1. Joint (A) (Fixed Joint) shall be the new joint with the shortest distance to the next transverse joint or working random crack. Place deformed bars perpendicular to the face of the saw cut.
 2. Joint (B) (Free Joint) shall be the new joint with the greatest distance to the next transverse joint or working random crack. Install smooth bars within the tolerances shown on the "Dowel Bar Placement - Full Depth Repair" detail sheet.
 3. Place free joint (Joint (B)) on the approach side of the repair when the distance to the next transverse joint or working random crack is equal for both new joints.

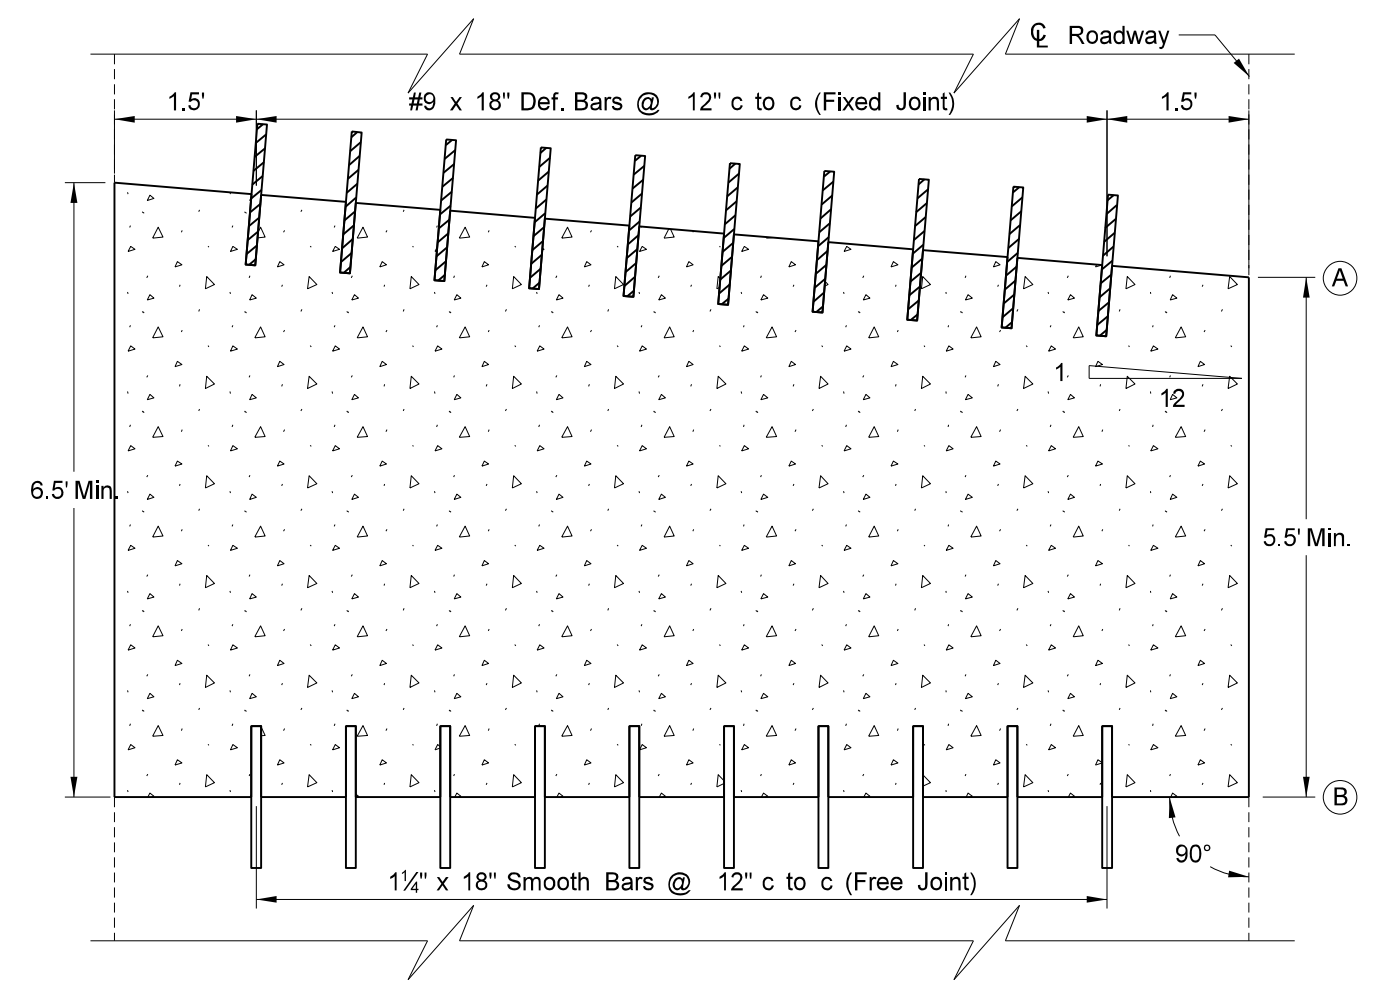

 PCC Pavement Placement

This document
is preliminary
and not for
construction or
implementation
purposes.

Concrete Pavement Repair For Non-Skewed Joints
Full Depth, Non-Reinforced PCC Pavement
(Longitudinal Length Less Than One Panel)

Project Description

Project Location